

## AXPOLY®

PS01 3009 Impact Modified Polystyrene - Green

### Description:

High quality polymer resin for use in injection moulding or sheet extrusion applications. This green version of our popular PS01 range is one example of the colour finish we can achieve when matching to customer supplied samples or defined pigment numbers.

### Source:

Unique separation and refining technologies allows Axpoly® PS01 resin to be produced from post-consumer fridge liner plastics derived from primary WEEE treatment plants. All production batches are traceable back to the origin of the raw material as part of the certified manufacturing process.

### Quality Control:

Every tonne of every batch is made under our strict ISO9001 QC system to ensure that customers are confident about the reliable and consistent performance of the polymer during thermoforming and moulding operations. Customer feedback confirms that end products are 'better than virgin' in many aspects, such as dimensional stability, surface finish and price per mould impression.

### Environment:

Produced from 100% post-consumer raw materials, this product fits closely with our other Axpoly® recycled resin grades and offers the same set of user benefits, including:

- Successfully replaces virgin resin
- Huge savings in CO<sub>2</sub> impact - at least 80% less
- Appeals to 'greener' customers
- Cost-down on raw material
- Saves the Planet!

Axpoly® is available in 1 tonne polyester big bags on a pallet, other formats possible on request.


## Axion Polymers

Langley Road South, Salford, M6 6HQ

Telephone: (+44) 161 737 6124

Email: [info@axionpolymers.com](mailto:info@axionpolymers.com)

Notes: All grades are assessed to ISO Standards, are ROHS compliant and REACH ready

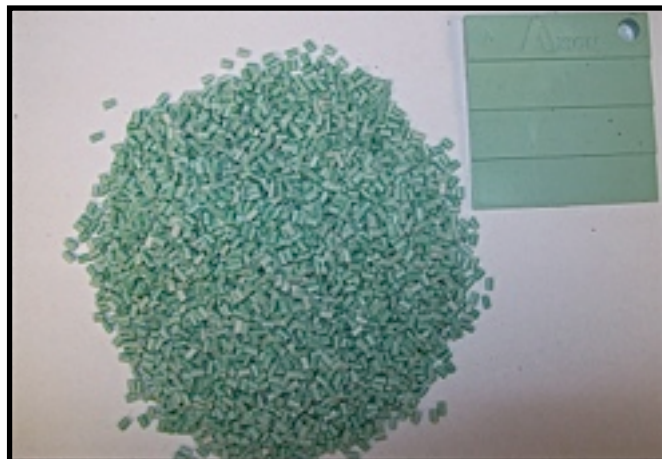

| PARAMETER          | ISO       | SPEC   |      | TYPICAL PROPERTIES       |
|--------------------|-----------|--------|------|--------------------------|
|                    |           | Min    | Max  |                          |
| MFI (5 kg @ 200°C) | 1133      | 5      | 8    | 6 g / 10 mins            |
| Density            | 1183-1    | 1.03   | 1.06 | 1.03 g / cm <sup>3</sup> |
| Tensile Strength   | 527 - 1/2 | 15     | 25   | 22 MPa                   |
| Impact Strength    | 180       | 6      | 10   | 8 kj / m <sup>2</sup>    |
| Moisture Content   | %         | <0.25% |      | 0.17%                    |
| Elongation @ break | 527 - 1/2 | 25%    | 50%  | 35%                      |
| Pellet Size        | mm        | 2mm    | 4mm  | 3mm                      |

